

HUBER+SUHNER® DATA SHEET

Coaxial Cable Connector: 11_BNC-50-3-16/133_N

Rev.: D




Description

Straight cable plug

Interface Standards

IEC 61169-8_MIL-STD-348A/301_CECC 22120

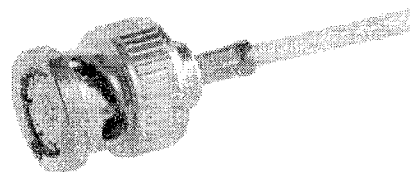

Technical Data

Electrical Data

Impedance 50 Ω
Interface frequency max. 4 GHz

Mechanical Data

Centre contact crimped
Outer contact crimped
Weight 0.0101 kg

Environmental Data

Operating Temperature -65 °C to 165 °C
2002/95/EC (RoHS) compliant

Material Data

Piece Parts

Centre contact
Outer contact
Body
Insulator
Coupling nut
Gasket
Crimp ferrule

Material

Brass
Brass
Brass
PFA / PTFE
Brass
MVQ (Silicone Rubber)
Copper

Surface Plating

Gold Plating (Nickel underplated)
SUCOPLATE (R) Plating
SUCOPLATE (R) Plating

SUCOPLATE (R) Plating
SUCOPLATE (R) Plating

Related Documents

Outline drawing DOU-00006659
Catalogue drawing DOU-00006196
Assembly instruction DOC-0000179061

Ordering Information

Bulk 100 pcs package 11_BNC-50-3-16/133_NH
Single package 11_BNC-50-3-16/133_NE

Additional Information

Suitable cables RG_223_/U, RG_142_B/U, G_03232_D-01

HUBER+SUHNER is certified according to ISO 9001 and ISO 14001

WAIVER!
It is exclusively in written agreements that we provide our customers with warrants and representations as to the technical contained specifications and/or the fitness for any particular purpose. The facts and figures here'in are carefully compiled to the best of our knowledge, but they are intended for general informational purposes only.

HUBER+SUHNER – Excellence in Connectivity Solutions



HUBER+SUHNER AG
RF Technology
9100 Herisau, Switzerland
Phone +41 (0)71 353 41 11
Fax +41 (0)71 353 45 90
www.hubersuhner.com